


Technical specifications




Aluminium profile

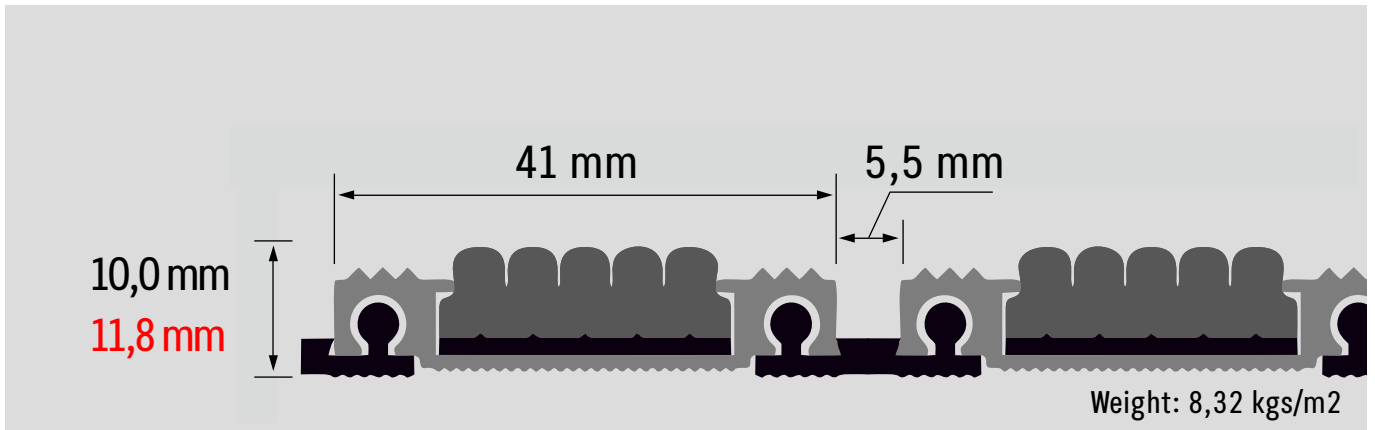

Composition: 6063 aluminium alloy with T.5 treatment

Weight: 281 grammes / linear meter

Joint between profiles

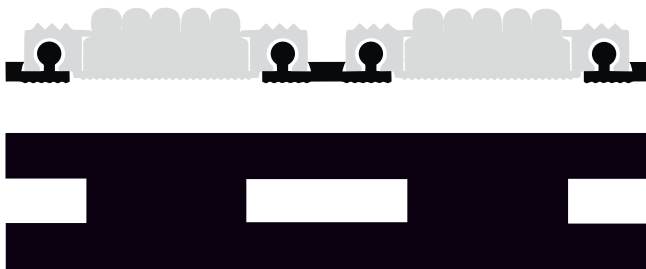

Composition: Plasticised PVC of SHORE A95 hardness

Weight: 80 grammes / linear meter

Drainage perforations: 6x22 mm
Distance between perforations: 22mm

Carpet upper insert



Manufacturing process: "Needled pile floorcovering" ISO 2424

Surface aspect: Looped

Pile yarn composition: 100 % PP (polypropylene)


Backing: "Waffle" ISO 2424

Pile weight: 1150 gr / m²
1750 gr / m²

Total weight: 2170 gr / m² (+/- 7,5 %)
2780 gr / m² (+/- 7,5 %) ISO 8543
ISO 8543

Pile height: 3,6 mm (< 7: +/- 0,5 % / >= 7: +/- 7,5 %)
5,5 mm (+/- 0,5 %)

Total height: 9,2 mm (< 7: +/- 0,5 % / >= 7: +/- 7,5 %)
11 mm (+/- 0,5 %) ISO 1766
ISO 1766

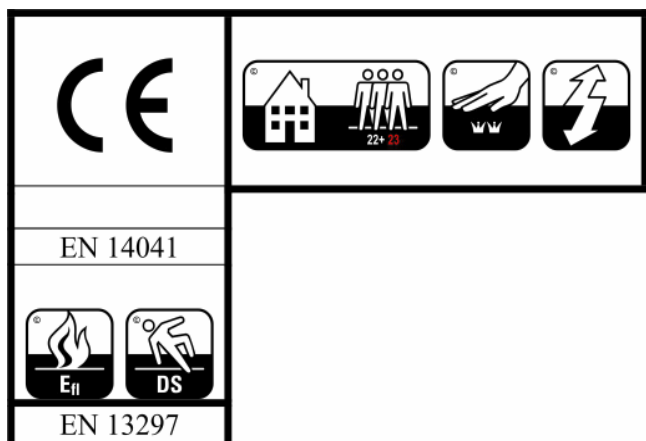

(*) Versión "heavy duty"